Model: SP-A390


Ceiling Exhaust Fan

Standard Construction Features:

- Corrosion resistant galvanized steel scroll and housing - Sound absorbing insulation - White designer non-yellowing grille - Rectangular outlet duct collar with integral spring loaded backdraft damper - Double inlet forward curved wheel - Plug type disconnect - Adjustable mounting brackets - Field rotatable discharge

Selected Options & Accessories:


Motor with Thermal Overload
Motor with CSA Approval
Motor with 40 Degree C Ambient Temperature
UL/cUL 507 Listed - Electric Fan
Adjustable easy installation mounting bracket
Standard Grille
Polypropylene Wheel Material

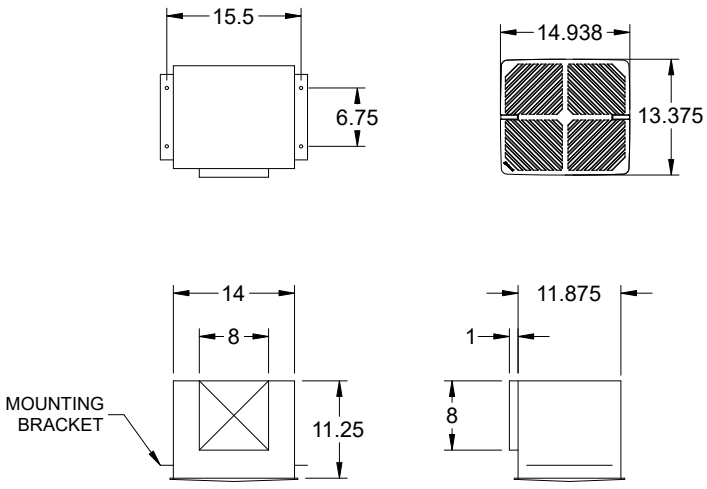

Dimensional	
Quantity	3
Weight w/o Acc's (lb)	24
Weight w/ Acc's (lb)	24

Performance	
Requested Volume (CFM)	390
Actual Volume (CFM)	410
Total External SP (in. wg)	0
Fan RPM	1350
* FLA (A)	1.42
Elevation (ft)	5,138
Airstream Temp.(F)	70
Air Density (lb/ft3)	0.062
Sones	4.5

Motor	
Motor Mounted	Yes
** Input Watts (W)	135
Voltage/Cycle/Phase	115/60/1
Enclosure	ODP

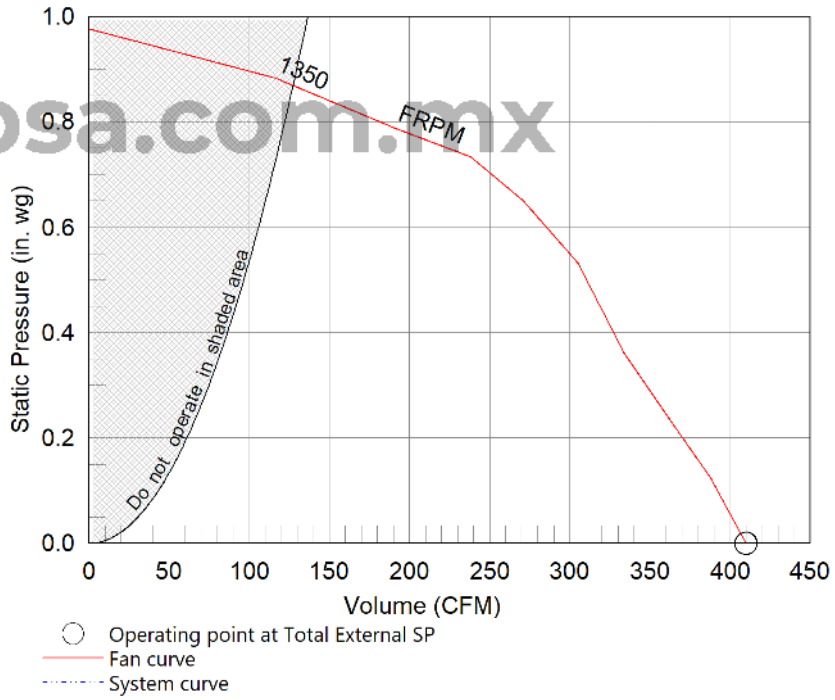

pipsa.com.mx

Notes:

All dimensions shown are in units of in.
*FLA is approximate and will vary slightly with the motor.
Sones - calculated using AMCA 301 at 5 ft
** Wattage is shown at free air.
** Wattage is approximate and may vary between motors.